

INSTALLATION INSTRUCTIONS FOR 1995-2004 TOYOTA TACOMA 4 X 4 AND PRERUNNER 3" SUSPENSION LIFT KIT

PART NUMBER 425L (Patent Pending)

(For use as leveling kit or with Add-A-Leaf – Note: Add-A-Leaf NOT included)

WARNING!!! READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE PROCEEDING. MAKE SURE THAT YOU HAVE ALL TOOLS AND PARTS BEFORE BEGINNING THE INSTALLATION.

SPECIAL TOOLS REQUIRED:

REVTEK SC-1 SPRING COMPRESSOR (OR EQUIVALENT) METRIC TUBING WRENCHES

REVTEK INDUSTRIES RECOMMENDS THAT RED LOCTITE BE USED ON ALL FASTENERS UNLESS OTHERWISE NOTED. IT IS ALSO RECOMMENDED TO HAVE THE FRONT END ALIGNMENT CHECKED AFTER INSTALLATION.

KIT CONTENTS INCLUDE:

PARTS LIST INCLUDED IN KIT

-	Instructions including parts list		
_	Product Safety Label (orange)	<u>FRONT</u>	ŀ
	Window decal	PRELOAD SPACER	F
	Warranty	TOP OUT EXTENDER	7
	j .	10MM X 1.25MM STUD	S
-	Differential Spacer Kit (see page 6 of instructions)	DIFFERENTIAL SPACER KIT	
		DIFFERENTIAL DROP SPACERS	F

TORQUE SPECIFICATIONS

8MM FASTENERS	17 LBS.
10MM FASTENERS	30 LBS.
12MM FASTENERS	55 LBS.
9/16" U-BOLT	75 LBS.
LUG NUTS	75 LBS.

ADDITIONAL PARTS REQUIRED


LONGER SHOCKS ARE REQUIRED FOR THE REAR; RANCHO RS5143 OR EQUIVALENT CAN BE USED

FRONT	PART#	QTY.
PRELOAD SPACER	PLS-2	2
TOP OUT EXTENDER	TOE-2	2
10MM X 1.25MM STUD	STD-6	6
DIFFERENTIAL SPACER KIT		
DIFFERENTIAL DROP SPACERS	RTDDS-1	2
1/2 – 13 X 8 GRADE 5 HEX BOLT	R1285Z	2
(ZINC)		
½ - 13 NYLOCK NUT (ZINC)	R128NZ	2
M8 X 1.25 X 35MM HEX BOLT	RM835Z	2
(ZINC)		
M8 FLAT WASHERS (ZINC)	RM8FWZ	2
REAR		
LIFT BLOCK	CB-4	2
U-BOLT	UB-4S	4
U-BOLT NUT	UBN-8	8
U-BOLT WASHER	UBW-8	8
EXTENSION BRACKET	PVB-1	1
8 X 1.25 X 16 BOLT	PV16B-2	2
8 X 1.25 X 30 BOLT	PV30B-2	2
8 X 1.25 LOCK NUT	PVBN-2	2
SPACER	PVBS-2	2
BRAKE LINE	BL-1	1

PRODUCT SAFETY LABEL MUST BE INSTALLED INSIDE CAB IN PLAIN VIEW OF ALL OCCUPANTS.

09/09/08 Page 1 of 7

Tacoma 4WD & PreRunner Installation Instructions (For use as leveling kit and with Add-A-Leaf)

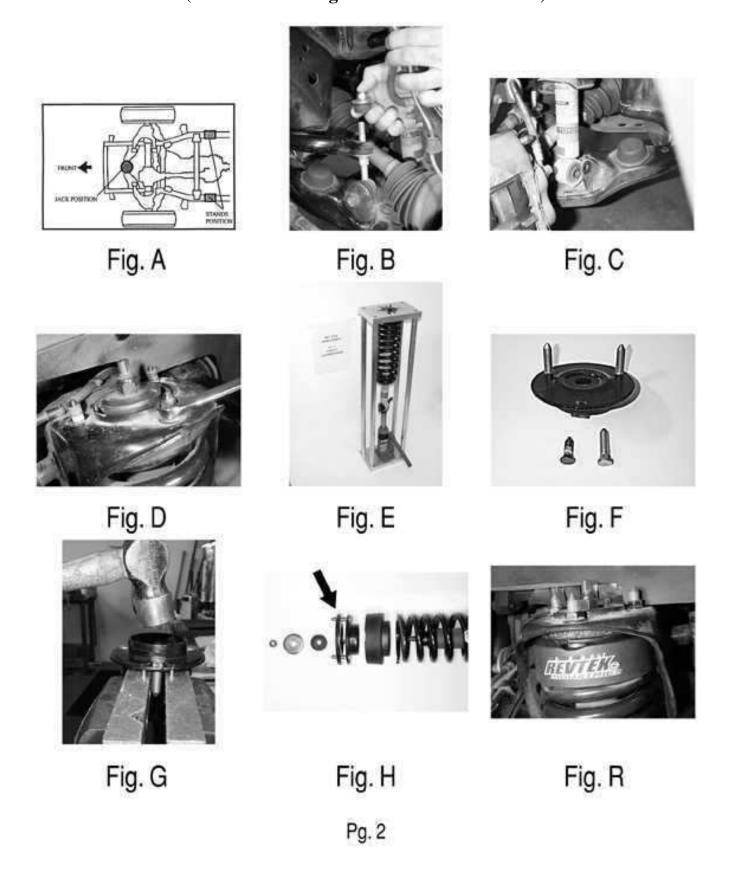

Tacoma 4WD & PreRunner Installation Instructions (For use as leveling kit and with Add-A-Leaf)


FRONT OF VEHICLE

- 1. Park vehicle on level concrete surface.
- 2. Center and lock the steering wheel.
- 3. Block the rear wheels of the vehicle to prevent vehicle from moving in either direction.
- 4. Jack up the vehicle from the lift point in Figure "A."
- 5. Support the vehicle with jack stands from the points in Figure "A."
- 6. Remove the front wheels.
- 7. Remove the nut (14mm) and the hardware from the anti-sway bar. See Figure "B."
- 8. Remove the nut (19mm) and bolt (14mm) from the bottom of the strut. See Figure "C."
- 9. Remove the three nuts (14mm) from the top of the strut. See Figure "D."
- 10. Remove the strut from the vehicle.

NOTE: AT THIS TIME, IF YOU DO NOT HAVE A SUITABLE SPRING COMPRESSOR, IT IS HIGHLY ADVISED TO EITHER TAKE THE STRUT TO A QUALIFIED SERVICE CENTER OR PURCHASE THE REVTEK SC-1 SPRING COMPRESSOR.

- 11. Compress strut assembly and remove the nut (17mm) on the top of the strut shaft in Figure "E."
- 12. Release the compressor.
- 13. Remove the spring top plate from the strut.
- 14. Remove and discard the rubber spacer.
- 15. Remove (hammer) the studs from the spring top plate. See Figure "F."
- 16. Install (hammer) the LONGER STUDS (10MM) (provided) in the spring top plate. See Figure "G."
- 17. Install the PRELOAD SPACER between the spring and the spring top plate with the small diameter facing toward the spring. See Figure "H."
- 18. Compress the strut assembly, making sure you center the strut shaft through the spring top plate hole and that the STUDS line up with the PRELOAD SPACER reliefs. Replace nut on the top of the strut shaft and torque to spec. (Figure "E"). (Torque specs can be found on page 1.)
- 19. Install the TOP OUT EXTENDER over the STUDS (Figure "H").
- 20. Reinstall the strut by reversing the removal procedure; torque to spec. (Torque specs on page 1.)
- 21. When properly installed, PRELOAD SPACER relief and Revtek Industries logo should face outward. (Figure R)
- 22. Reinstall hardware and nut on anti-sway bar; torque to spec.
- 23. Replace the wheels; torque to spec.

Tacoma 4WD & PreRunner Installation Instructions (For use as leveling kit and with Add-A-Leaf)

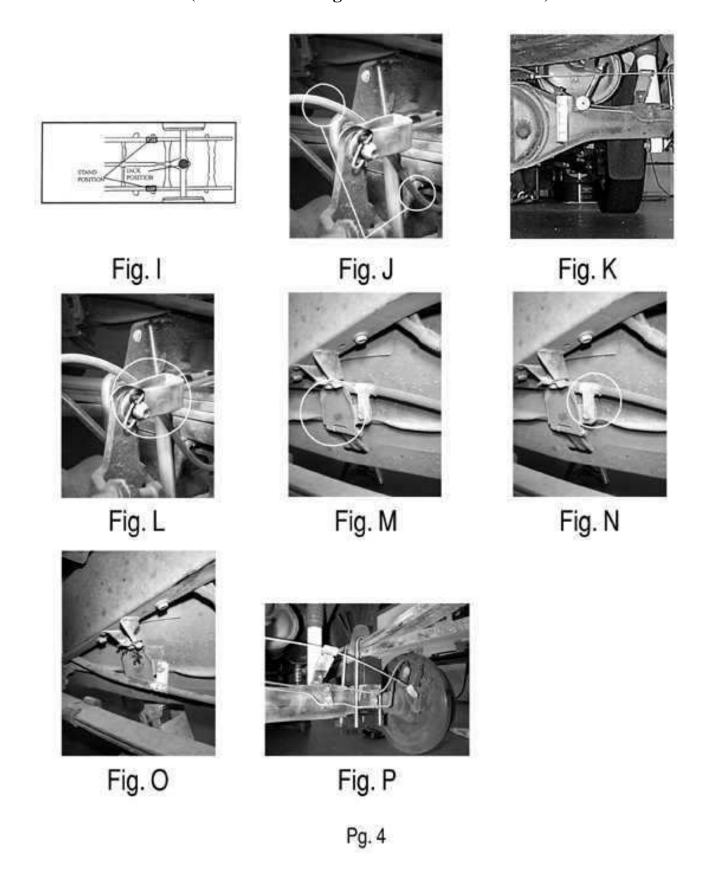

Tacoma 4WD & PreRunner Installation Instructions (For use as leveling kit and with Add-A-Leaf)

REAR OF VEHICLE

- 1. Place vehicle on level concrete surface.
- 2. Block front wheels to prevent vehicle from moving in either direction.
- 3. Make sure parking brake is off.
- 4. Lift the truck from the center of the rear differential housing, leaving the jack in place to support the differential.
- 5. Support the vehicle with jack stands from the points indicated in Figure "I."
- 6. Remove rear wheels.
- 7. Remove the rubber brake line that goes from the frame to the distribution block on the differential housing. (Figure "J")
- 8. Replace the BRAKE LINE with the LONGER ONE supplied in the kit.
- 9. BLEED THE BRAKES AND TOP OFF THE FLUID LEVEL.
- 10. Remove the proportioning valve arm where it attaches to the differential housing. (Figure "K")
- 11. Attach the provided EXTENSION BRACKET between the differential housing and the proportioning valve arm using the supplied SPACERS AND HARDWARE; torque to spec. (Figure "K")
- 12. Carefully support the fuel tank.
- 13. Disconnect the parking brake cables at the backing plates on the differential housing. (Fig. "L")
- 14. Remove the bracket that supports the fuel tank on the rear of the driver's side. (Figure "M")
- 15. Remove the bracket that supports the parking brake cable on the fuel tank. (Figure "N")
- 16. Turn the bracket over (to move the parking brake cable down) and reattach to the outside of the fuel tank bracket (Figure "O"); torque to spec.
- 17. Reattach the bracket that supports the fuel tank; torque to spec.
- 18. Remove the shocks.
- 19. Remove the U-bolts.
- 20. Carefully lower the floor jack, creating just enough room to place the LIFT BLOCK between the spring pad and the spring pack with the locating pin facing down. Make sure that the small end of taper of the BLOCK faces toward the front of the vehicle. (Figure P)
- 21. Raise the floor jack slightly, with just enough tension to hold the spring, BLOCK, and differential housing together.
- 22. Put in the new U-BOLTS, WASHERS AND NUTS supplied in the kit (Figure P); torque to spec.
- 23. Replace the rear shocks with RANCHO PART # RS5143 or equivalent.
- 24. Reconnect the parking brake cables at the backing plates (now located under the spring pack). (Figure P)
- 25. Replace the wheels; torque to spec.

REVTEK INDUSTRIES, LLC 1-503-659-1650 4288 SE International Way, Portland OR 97222

Tacoma 4WD & PreRunner Installation Instructions (For use as leveling kit and with Add-A-Leaf)

DIFFERENTIAL DROP SPACER KIT

(MANDATORY ON ALL 4-CYLINDER TACOMA'S FOR 2001 – 2004)

- 1. Remove both skid plates under the front of the vehicle. Save the OEM bolts (total of nine (9) 12mm bolts).
- 2. Remove factory 19mm x 7" long bolts and nuts, supporting the front differential. (See Figure 1). Save the OEM washers for step 3.
- 3. Install Revtek spacers RTDDS-1 between the two front differential supports and front crossmember. Fasten to cross-member using new ½ x 8" long bolts and nuts (making sure to reuse the factory washers). (See Figure 2.)
- 4. Install the FRONT skid plate using three (3) OEM bolts on the front and two (2) new M8 x 35mm bolts in the rear. DO NOT TIGHTEN YET.
- 5. To install the REAR skid plate, elongate the rear mounting holes with a file for fitment. Once holes are elongated, mount rear skid plate with OEM 12mm bolts.
- 6. Torque all skid plate bolts to specs.





REVTEK INDUSTRIES, LLC 1-503-659-1650 4288 SE International Way, Portland OR 97222

Tacoma 4WD & PreRunner Installation Instructions (For use as leveling kit and with Add-A-Leaf)

Limited Lifetime Warranty

Revtek Industries products are warranted to be free from material and workmanship defects for as long as the original retail purchaser owns the vehicle upon which such products were originally installed (proof of purchase required). The consumer will be responsible for removing from the vehicle and returning any defective item, freight prepaid, and for reinstallation. This warranty is non-transferable. Revtek Industries' limit of liability under this warranty is to repair or replace the product at Revtek Industries' option. Consequential costs such as, but not limited to labor fees, loss of use, loss of time or freight charges are not covered. Any product that has been abused, altered, incorrectly installed, or used in competition is not covered. Product finish is excluded from this warranty. Items that are subject to wear are not considered defective when worn and are not covered. The warranty is void if the "Warning to Driver" decal is not properly displayed on the vehicle. No other warranties are expressed or implied. We reserve the right to make changes in design, materials, and specifications without prior notice.

This warranty gives you specific legal rights and you may also have other rights which may vary from state to state. Some states do no allow limitations on how long an implied warranty lasts or allow the exclusion or limitation of incidental or consequential damages, the above limitation or exclusion may not apply to you.

There are no warranties, expressed or implied including any implied warranties of merchantability and fitness, which extend beyond this warranty period. There are no warranties that extend beyond the face hereof. Seller disclaims implied warranty of merchantability.

This warranty shall not apply to any product which has been improperly installed, modified or customized. Warranty does not apply to any components used for racing purposes or racing type activities.

To make a claim under this warranty contact Revtek Industries about the problem prior to removing any parts from the vehicle. If it appears that the part is warrantable, you will be given a Return Authorization (RA) number and asked to return the part freight prepaid. If the part is found to be warrantable, it will be repaired or replaced and returned to you. All freight charges are the customer's responsibility. If a replacement part is needed before the part in question can be returned, you must first purchase the replacement part. Then, if the part in question is deemed warrantable, you will be credited / refunded.



Revtek Industries, LLC 4288 SE International Way, Portland OR 97222 Phone: (503) 659-1650 Fax: (503) 659-2931